



May 28th, 2018

PRJ18012

Thompson Nicola Regional District
300-465 Victoria St.
Kamloops, B.C. V2C 2A9

Attention: **Kory Ryde**
EHS Technologist

Dear Mr. Ryde,

Re: Lower Nicola Landfill 2017 Greenhouse Gas (GHG) Emissions Reduction Quantification

Sperling Hansen Associates (SHA) are pleased to submit this letter report on *2017 greenhouse gas (GHG) emissions reduction for the Lower Nicola Landfill*.

1 LANDFILL INFORMATION

The Lower Nicola Landfill is located 2 km west of Lower Nicola on Highway #8 in British Columbia (BC). The site serves approximately 12,293 people from the City of Merritt and surrounding rural areas and also accepts refuse from the Thompson Nicola Regional District (TNRD) transfer stations in Aspen Grove, Mamit Lake, Spences Bridge and surrounding First Nation communities. The landfill footprint, Lot B which encompasses approximately 16 Ha, is surrounded by the TNRD land titled District Lot 4553 of approximately 25 Ha.

The Lower Nicola Landfill was originally permitted as a waste management site in September, 1976 for the disposal of municipal refuse from Merritt, Lower Nicola and surrounding rural areas. Historically, waste filling activities at the Lower Nicola Landfill have been in the central and southern portions of the site and have been completed using a combination of the trench and ramp methods. The current active face of the landfill is located in the north west corner of the landfill footprint as shown in the enclosed Figure 3.

Figure 1 shows location of the Lower Nicola Landfill.



Figure 1. Lower Nicola Landfill Location

2 LANDFILL GAS GENERATION ASSESSMENT

In 2014, SHA completed a landfill gas (LFG) generation assessment for the Lower Nicola Landfill. The LFG generation estimates showed that the annual methane generation at this site was approximately 271 tonnes/year. Methane generation rate in 2017 was estimated to be approximately 300 tonnes/year. Figure 2 below shows the methane generation estimate at the Lower Nicola Landfill from 1984 to 2018.

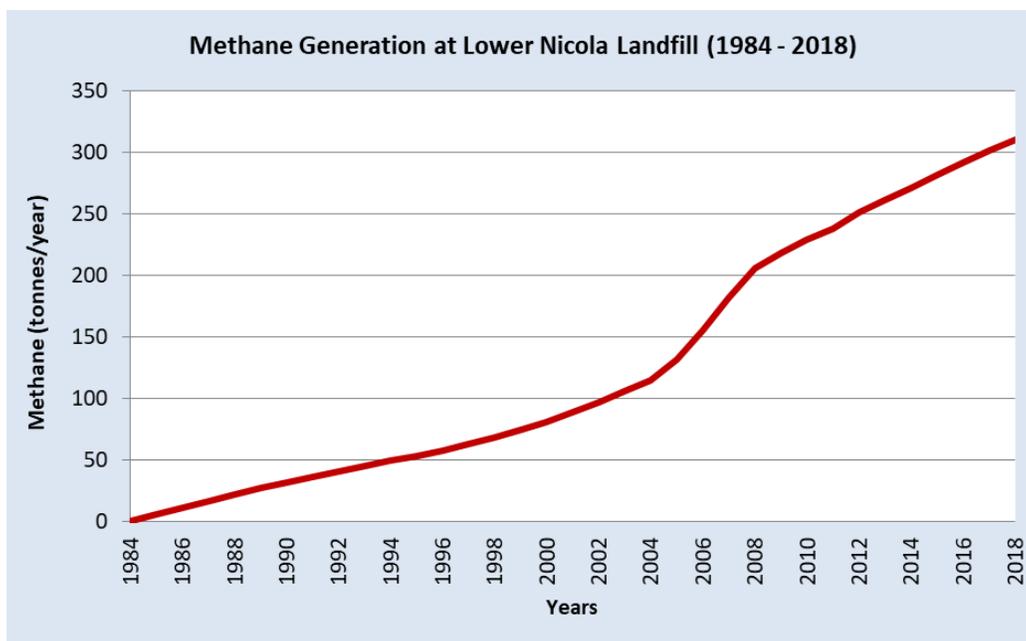


Figure 2. Methane Generation Estimate at Lower Nicola Landfill

The methane generation at the Lower Nicola Landfill is estimated to be well below the 1,000 tonnes/year threshold set by the BC Ministry of Environment (MOE) as per LFG Management Regulation (2008). Therefore, this site is not required to install an active LFG management system and the relatively small amount of the generated methane can be released to the atmosphere without any active LFG management system.

A summary of estimated methane generation rates for the Lower Nicola Landfill is presented in Table 1.

Table 1. Summary of Methane Generation Modeling Results (MOE Tool)

Item	Year of Estimate	Mass of Methane
		(tonnes/year)
Estimated Quantity of Methane Produced in the Year Preceding the Assessment	2013	261
Estimated Quantity of Methane Produced in the Year of Assessment	2014	271
Estimated Quantity of Methane Produced one Year after the Assessment	2015	281
Estimated Quantity of Methane Produced two Years after the Assessment	2016	291
Estimated Quantity of Methane Produced three Years after the Assessment	2017	301
Estimated Quantity of Methane Produced four Years after the Assessment	2018	310

3 GHG EMISSIONS REDUCTION INITIATIVE

Even though the Lower Nicola Landfill is not mandated to collect and destroy/oxidize the generated methane, the TNRD engaged SHA to explore options for implementation of a methane emissions reduction initiative at this site in 2014. SHA's recommendation was to apply an engineered biocover system in the areas of the landfill that would not receive additional waste in the near future. The use of engineered biocover systems to reduce fugitive methane emissions from landfills is an emerging GHG mitigation technology. Biocover systems, fabricated using organic residuals such as biosolids, compost and wood chips, can have ideal physicochemical properties that stimulate the growth of methanotrophic bacteria that consume methane and produce carbon dioxide, a less potent GHG.

The TNRD adopted this approach and implemented biocover system over top of the closed areas of the Lower Nicola Landfill in the central and southern portions of the site early 2015. The implementation of the biocover system at the Lower Nicola Landfill started after a baseline GHG emissions measurement was completed at this site by SHA in October 2014. Subsequently, SHA completed additional rounds of GHG emissions measurement in 2016 and 2017 to assess

efficiency of the biocover system in methane oxidization and to quantify the GHG emissions reduction achieved in each year. SHA concluded biocover efficiency levels of 21% and 30% with total GHG emissions reduction of 370 and 350 tonnes of carbon dioxide equivalent (CO₂-e) per year for 2015 and 2016, respectively.

The TNRD retained SHA to conduct another round of field measurement at the Lower Nicola Landfill, to evaluate effectiveness of the biocover system and to quantify the GHG emissions reduction achieved at this site throughout 2017.

4 LITERATURE REVIEW ON BIOLOGICAL OXIDATION OF METHANE

Methane oxidation in landfill cover soil reduces GHG emissions from landfills. There are a number of published and peer reviewed scientific research papers that have reported methane oxidation fractions through operational soil cover at 22-55% (Whalen et al., 1990; Chanton et al., 2009; Chanton et al., 2011). Abedini et al. (2016) showed average methane oxidation values of 28% and 34% occurring at the cover soils of two different areas of the Vancouver Landfill in BC.

The U.S. Environmental Protection Agency (USEPA, 2004) also reported an average methane oxidation rate of 10-25% with lower rates for clay cover soil and higher rates for topsoil. However, due to the challenges of accurately measuring methane oxidation and lack of standard quantifying methods, the U.S. EPA recommends a default average value of 10% methane oxidation for cover soil (USEPA, 2004). This minimum baseline methane oxidation rate for landfill cover soil is also adopted by Climate Action Reserve (CAR) protocol, Pacific Carbon Trust (PCT) LFG management protocol, as well as the Intergovernmental Panel on Climate Change (IPCC) guidelines and protocols for national GHG inventories. In the following analysis, because the baseline methane emissions measurement was completed after placement of the cover soil, the baseline methane oxidation was already factored in the calculations. Therefore, additional deductions were not applied.

For engineered fabricated biocovers, the methane oxidation rate is reported to be between 50-100%, depending on the biocover design, climate, and the methane loading rate on the biocover (Barlaz et al., 2004; Stern et al., 2007; Abichou et al., 2009). Proper installation and maintenance of the biocover system is required to ensure effectiveness of the system and to avoid methane displacement, rapid advection of the gas through the cracks and creation of emission hot spots.

5 BIOCOVER APPLICATION AND MONITORING

The fabricated biocover was placed by the TNRD on the crest area (Crest 1 in Figure 3) as well as the side slope areas of the central and southern parts of the Lower Nicola landfill (Slopes 1 through 4 in Figure 3). This was done in early 2015, followed by additional biocover that was placed on the areas of Slopes 1 and 3, that SHA identified as emission “Hot Spots” in its first follow up field work and GHG emissions quantification report for this site.

The following photos show the Slope 3 area before biocover application (2014), and after the latest round of surface scan (2018).



Photo 1. Slope 3 (S3) Area before application of biocover (2014)



Photo 2. Slope 3 (S3) Area during latest round of emission scan (2018)

As part of the landfill operation and waste disposal activities in 2016 and 2017, a portion of the biocover in Slope 3 area (facing west) was buried under next lifts of MSW. This area, which is shown in enclosed Figure 3, was removed from 2017 GHG emissions reduction calculations. However, following SHA recommendations and to maximize the GHG emissions reduction from this site, the TNRD has continued to place additional biocover on the south slopes of the current active cell. These areas, shown as Slope 5 and Slope 6 in enclosed Figure 3, received biocover in early 2018. Therefore, the offset credits resulted from application of biocover in these areas will be included in next year's assessment for 2018 GHG emissions reduction quantification.

Photos 3 and 4 show the new biocover material placed on slopes 5 and 6, respectively.



Photo 3. Slope 5 Area south of current active cell received biocover in early 2018



Photo 4. Biocover placed on Slope 6 Area, lower slopes south of the active cell

While expansion of the biocover system will surely increase the 2018 GHG reductions, it is important to use proper media, optimized to maximize the effectiveness of the system in methane oxidation and maximized generated offset credits. From the visual observations conducted during the site visit, it appeared that the wood chips content of the applied biocover exceeds the amount that SHA usually recommends for an optimum blend. Furthermore, the biocover thickness seemed to be too thin and washed out in some areas. Recommended thickness of the biocover for sites with low methane generation rates similar to the Lower Nicola landfill is 300 mm to 400 mm.

The finished side slopes that recently received biocover at the Lower Nicola Landfill were at 18.2° or 3H:1V (3 Horizontal to 1 Vertical). This is the recommended side slope for landfill external side slopes and appropriate for placement of biocover media. Photo 5 shows slope of the area that recently received biocover at 18° (i.e. \sim 3H:1V)



Photo 5 – Proper side slope in Area Slope 5 (3H:1V)

Field monitoring for quantification of the GHG emissions reductions achieved in 2017 by application of biocover were completed in May 21st, 2018. Similar to previous years, SHA used an advanced technique to measure the fugitive methane emissions and compared the results with the baseline emission rates before application of biocover. The methodology and the results of these site investigations are explained in the next section.

5.1 Methane Emissions Measurement

Fugitive methane emissions measurements from the biocover area were conducted through an approach developed by Abedini and Atwater (2014). This patent pending methodology involves measurement of surface methane concentrations (SMC) from the area of interest, as well as conducting complementary flux chamber measurements in representative areas to measure methane emission rates (MER). When emission rates are below detection limit of the flux chamber technique, the SMC results, measured down to 0.00001% percent methane, are translated to MER using a default correlation factor (Abedini, 2014). The SMC and MER measurement techniques are further described below.

5.1.1 Surface Methane Concentration Scan

The surface methane concentration (SMC) scan using a flame ionization detector (FID) is an approved methodology used across the united states (US), where it is required by the US Environmental Protection Agency's (EPA) new source performance standard (NSPS) regulation. Because quantification of methane emissions is not economically feasible for all landfills, the NSPS regulation requires that methane concentrations at the surface of the regulated landfills be kept below certain levels, indicating efficiency of the site's active LFG collection and control system. According to the NSPS, if the FID field measurements register values above the

threshold then the owner would have to implement mitigation measures within a given period of time.

5.1.2 Flux Chamber Measurements

Application of flux chambers in landfills is a well-established measurement method. This technique is to measure fugitive methane emissions from the soil surface through isolating and monitoring the emitting gas from soil. The flux chamber technique includes placing a closed chamber (box) on the landfill's surface and monitoring the change of methane concentration in the box over time. Based on the rate of change of methane concentration in the chamber over time, chamber volume and area beneath the chamber, the methane flux emitted from landfill's surface can be calculated.

Flux chamber technique is an approved methodology by the US EPA and is used when quantification of methane emissions is required. However, because it is a very time consuming methodology, it's been rarely implemented in MSW landfills at full scale. On the other hand, due to the technique detection limits, achieving reliable data from flux chamber measurements over top the biocover areas, where the methane is almost fully oxidized, is not practical and can be very difficult to detect. In contrast, the FID instrument can detect methane concentrations down to 0.1 ppm levels (i.e. 1×10^{-5} percent).

5.1.3 LFG Emission Measurement Technique at the Lower Nicola Landfill

The adopted methodology to evaluate biocover performance is a combination of the two above-mentioned techniques. This patent pending methodology was developed through the PhD research of Dr. Ali Abedini (Abedini, 2014). Abedini's methodology was developed based on comprehensive field investigations including FID surface scan of about 18 Ha and approximately 190 flux chamber measurements conducted at the Vancouver Landfill in BC. This technique, that involves quantification of fugitive methane emissions overtop of the biocover area based on the near-surface concentration of methane, was applied at the Lower Nicola landfill. The methane emission rates were then compared against the baseline methane emission rates (previously quantified using the same technique) to quantify the methane emissions reductions that were achieved by the biocover system.

For quantification of 2017 GHG emissions reductions at the Lower Nicola Landfill, series of SMC field measurements using the FID technique were completed in May 2018. The SMC scan was conducted over the entire biocover area (approximately 3 Ha). A Thermo Scientific TVA 2020 FID instrument was used to measure and log methane concentrations, along with GPS coordinates, approximately 1 inch above ground on the biocover surface. The scanned area was walked on approximate 5 to 10 m pathways while logging methane concentration every 3 seconds. The FID instrument was calibrated using calibration gas tanks prior conducting each set of measurements. Photo 6 below shows SHA's LFG Specialist, Dr. Abedini, conducting FID scan in a similar project.



Photo 6. Surface Methane Concentration Scan Using a Portable FID Instrument

Results of these field investigations at the Lower Nicola Landfill are presented in Section 6.

5.2 Climate Effect

A very important aspect of measurement of fugitive methane emissions from landfills is the effect of barometric pressure (BP) on the gas flux intensity. Fluctuation in BP is known to greatly impact LFG atmospheric emission (Abedini, 2014). When the BP is increasing, the heavier atmospheric pressure is applied on the ground, restricting natural LFG venting through the landfill surface, or migrating through the soil. Dropping BP reduces the pressure exerted on the ground, enabling LFG to move more freely from the landfill and increasing the potential for gas escape through surface or offsite lateral migration.

In order to account for the impact of BP on level of methane emissions during the field work, the BP variations were monitored, and the field measurement results were adjusted for the rate of change in BP values. The data presented in Figure 4 below were acquired from the Kamloops Airport Weather Station during the days of field investigation in 2018.

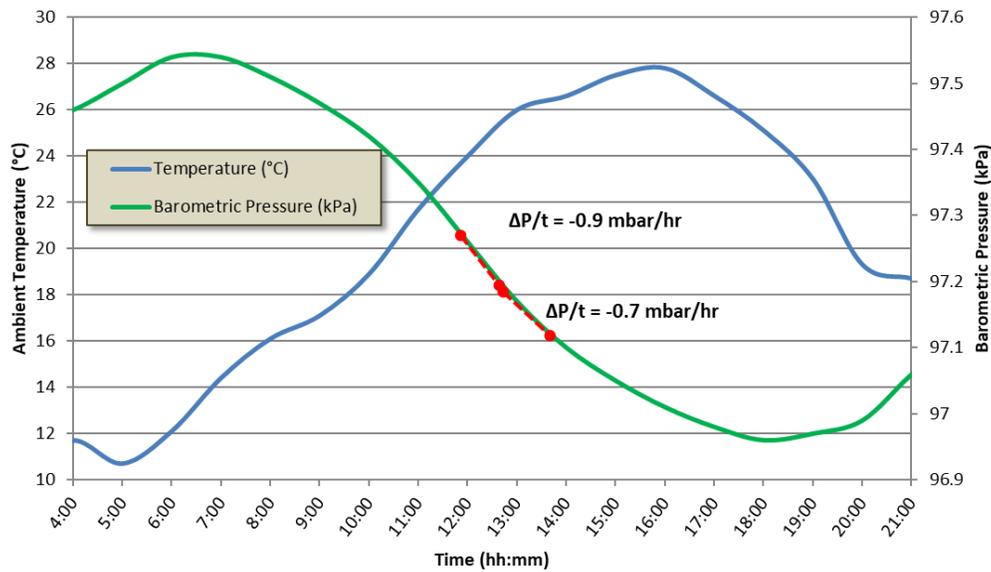


Figure 4. Climate Data for May 21st, 2018 (Source: Kamloops Airport Weather Station)

6 RESULTS

The total GHG emissions reduction achieved through biological oxidation of methane in biocover at the Lower Nicola Landfill includes “baseline” reductions and “additional” reductions. The average baseline reduction is normally the 10% methane oxidation that naturally occurs when methane travels through the cover soil placed at the top of completed phases. By quantifying the emission rates in two rounds, before and after placement of the biocover, the “additional” oxidation resulted from the application of biocover was estimated at the Lower Nicola Landfill.

Due to the low baseline methane emission rates at this site ($\sim 3 \text{ g/m}^2/\text{day}$) flux chamber measurements did not produce meaningful results. Therefore, the surface methane concentrations were translated into the methane emission rates based on Abedini’s methodology using the technique’s default correlation factor. As reported in our previous report, (*Lower Nicola Landfill 2016 Greenhouse Gas (GHG) Emissions Reduction Quantification*), the FID surface methane concentrations (SMC) scan showed an average methane concentration of 0.5 to 7 ppm in different areas before the placement of biocover. In 2015 and 2016 post construction monitoring events, these values were reduced to values ranging from 0.2 to 2.4 ppm, and 0.07 to 2 ppm, respectively. The range that we measured during the recent field work was 0.7 to 3.9 ppm showing higher level of emissions and lower effectiveness of the biocover system in comparison to the previous years. It should be noted that the additional biocover systems that were placed at the south slopes of the Lower Nicola Landfill in 2018 were not included in these recent assessments for 2017 GHG quantifications.

The overall methane emissions reductions that were concluded for 2015 and 2016 were approximately 21% and 30%, respectively. The slight improvement between 2015 to 2016 was a

result of additional biocover material that was placed in late 2015 on northern areas of Slope 3. The methane emissions reduction for 2017 was decreased to an average of 20%. Effectiveness of the biocover system in different areas was different and ranged between 2% and 29%. Notably, the biocover system in side slope areas that have a steeper slope (e.g. Slope 2 with approximately 2H:1V slope) showed much lower efficiency in comparison with the biocover system placed on shallower slopes (e.g. Slope 3). Steep side slopes result in instability of the biocover system, high erosion and washout of the biocover, and formation of cracks and fissures in the biocover from which methane escape was observed during the surface scan.

Photo 7 below shows a major emission hot spot identified during the recent FID scan in May 2018.



Photo 7. Large high methane emission hot spot identified in Slope 2 area

Steep slope, initial thin biocover, and not being maintained regularly have resulted in almost half of the biocover of this area being washed out during past two years and creation of large methane emission hot spot. Photo 8 shows the steep slope in this area.



Photo 8. Steep slope in Slope 2 area (2H:1V)

Figure 5 below shows a 3D illustration example of the SMC levels on the Crest 1 Area. The hot spots that were identified during this round of the FID scan are shown in Figure 3 included at the end of this report.

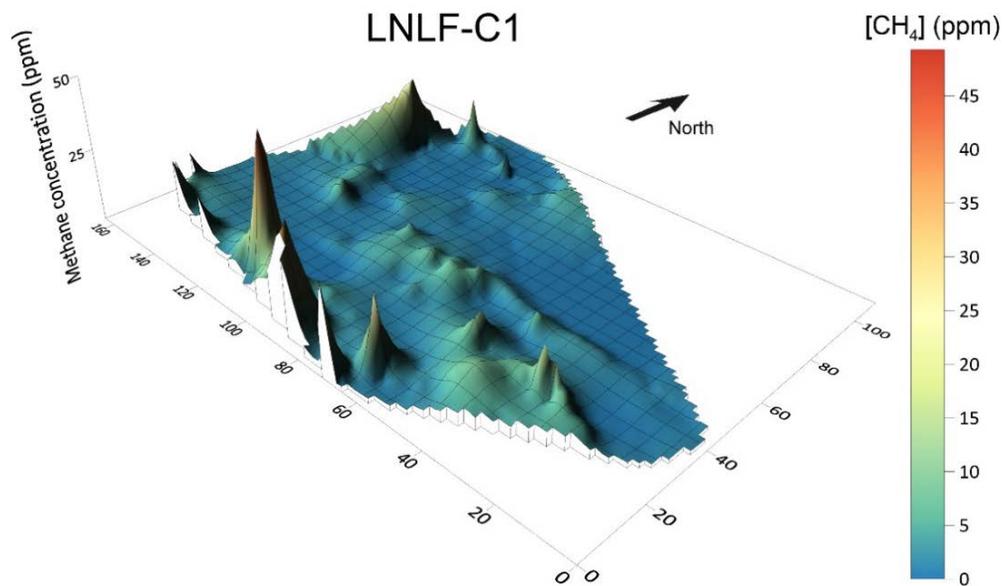


Figure 5. 3D illustration of surface methane concentrations in Crest 1 area, May 21st, 2018

Due to the emission hot spots and high intensity of the methane flux from these locations the overall effectiveness of the biocover system at the Lower Nicola Landfill has declined. Table 2 below summarizes the finding and the results of the baseline and follow-up round of the filed investigations at the Lower Nicola Landfill.

Table 2. Summary of Methane Emission Measurement Results at the Lower Nicola Landfill

	Grid Number	Footprint Area m ²	Surface Methane Concentration			CH ₄ Emission Rate (g/m ² /d) (Abedini, 2014)		% Reduction from Baseline	GHG Emissions Reduction
			MIN	MAX	AVG.	MER	±ΔMER		
			ppm	ppm	ppm			%	tonnes CO ₂ -e/year
Baseline Data	S1	2,810	1.61	62.74	2.85	2.30	0.85	-	-
	S2	1,890	1.04	10.40	2.65	2.24	0.85	-	-
	S3	5,550	1.91	58.45	6.93	3.61	0.99	-	-
	S4	11,550	1.69	5.04	2.05	2.05	0.82	-	-
	C1	10,000	1.99	2.55	2.22	2.10	0.83	-	-
	TOTAL	31,800	1.65	27.83	3.34	2.46			
2017 Data	S1	2,810	-	15.64	0.76	1.63	0.78	29%	17.1
	S2	1,890	-	143.78	2.51	2.19	0.84	2%	0.8
	S3	* 4,500	-	58.90	3.90	2.64	0.89	27%	39.9
	S4	11,550	-	125.00	0.59	1.58	0.78	23%	49.2
	C1	10,000	-	20.75	1.04	1.72	0.79	18%	34.5
	TOTAL	30,750	-	72.81	1.76	1.95		21%	141.5
						Annual Reduction (tonnes CO₂-e):		141.5	

* Reduced area due to waste disposal in active face

Taking into account the total footprint of the scanned area at the Lower Nicola Landfill, SHA estimated that a total of 6 tonnes of methane, equivalent to 142 tonnes of CO₂-e, was reduced through biological oxidization in the biocover system at this site in 2017.

7 CONCLUSION AND RECOMMENDATIONS

The current analyses showed that the implementation of biocover system at the Lower Nicola Landfill has resulted in GHG emissions reduction equivalent to 142 tonnes CO₂-e in 2017. The overall effectiveness of the biocover system at the Lower Nicola Landfill was decreased from last year's 30% to 21% in 2017. Creation of multiple emission hot pots were found to be the primary reason for the overall low efficiency of the system in GHG emissions reduction.

The TNRD has recently placed additional biocover in final south slopes of the active cell area. SHA believes that the recently placed biocover system will increase the 2018 GHG emissions reduction quantities. However, we recommend that the TNRD maintain the existing biocover area by placing additional layers of material, specially in the areas shown as emission hot spots in the attached Figure 3. We recommend minimum thickness of 300 mm of the biocover system to be maintained in order to maximize methane oxidation efficiency.

Furthermore, in preparation of the biocover media, we recommend an optimum blend be fabricated and applied. Important parameters affecting the efficiency of the system includes; (i) temperature, (ii) moisture content, (iii) organic matter, (iv) carbon to nitrogen ratio (C:N), (v) pH, and (vi) porosity and structure of the media. Some of the general recommendation for an optimum biocover media includes:

1. Moisture content of 10 to 30 %
2. Organic matter content of up to 35%
3. Optimum C:N ration of 25 to 97. C:N ration of less than 12 is not recommended
4. Optimal pH range of 6.5 to 8.0
5. High porosity to allow oxygen to enter and move through the media

To assess the suitability of the biocover material that was recently placed at the Lower Nicola Landfill, SHA recommends the following tests to be completed on at least three samples from the media;

- a) C:N Ratio
- b) Total Carbon Content
- c) Total Organic Carbon
- d) Total Nitrogen
- e) Total Organic Matter
- f) Moisture Content
- g) Density
- h) pH

Having these information, SHA will be able to assist the TNRD and provide further recommendations to optimize the biocover media and maximize the methane oxidation levels at this site.

8 LIMITATIONS

This report has been prepared by Sperling Hansen Associates (SHA) for the Thompson Nicola Regional District (TNRD) in accordance with generally accepted engineering practices to a level of care and skill normally exercised by other members of the engineering and gas science professions currently practicing under similar conditions in British Columbia, subject to the time limits and financial and physical constraints applicable to the services.

The report, which specifically includes all tables and figures, is based on engineering analysis by SHA staff on data compiled during the course of the project. Except where specifically stated to the contrary, the information on which this study is based has been obtained from external sources. This external information has not been independently verified or otherwise examined by SHA to determine its accuracy and completeness. SHA has relied in good faith on this information and does not accept responsibility for any deficiency, misstatements or inaccuracies contained in the reports as a result of omissions, misinterpretation and/or fraudulent acts of the persons interviewed or contacted, or errors or omissions in the reviewed documentation.

The report is intended solely for the use of the TNRD. Any use which a third party makes of this report, or any reliance on, or decisions to be made based on it, are the responsibilities of such third parties. SHA does not accept any responsibility for other uses of the material contained herein nor for damages, if any, suffered by any third party because of decisions made or actions based on this report. Copying of this intellectual property for other purposes is not permitted.

The findings and conclusions of this report are valid only as of the date of this report. The interpretations presented in this report and the conclusions and recommendations that are drawn are based on information that was made available to SHA during the course of this project. Should additional new data become available in the future, SHA should be requested to re-evaluate the findings of this report and modify the conclusions and recommendations drawn, as required.

Yours truly,
SPERLING HANSEN ASSOCIATES

Report prepared by:



Ali R. Abedini, Ph.D.
Senior Environmental Consultant
Landfill Gas Specialist

Report reviewed by:



Mircea L. Cvaci, P.Eng., MBA
Senior Civil Engineer
Vice President



9 REFERENCES

- Abichou, T., K. Mahieu, et al. (2009). "Effects of compost biocovers on gas flow and methane oxidation in a landfill cover." *Waste Management* 29: 1595-1601.
- Ali R. Abedini, James W. Atwater (2014). "Quantifying Fugitive Methane Emissions from MSW Landfills Based on Surface Methane Concentrations", Submitted for Publication.
- Abedini, A. R., J. Atwater, W. and J. Chanton (2016). "Quantifying Methane Oxidation in Cover Soils of the Vancouver Landfill Using the Stable Isotope Technique." *Current Environmental Engineering* 3: 1-11.
- Barlaz, M. A., R. Green, et al. (2004). "Evaluation of a biologically active cover for mitigation of landfill gas emissions." *Environmental Science & Technology* 38(18).
- Chanton, J. P., D. K. Powelson, et al. (2009). "Methane Oxidation in Landfill Cover Soils, is a 10% Default Value Reasonable?" *J. Environ. Qual.* 38(2): 654-663.
- Chanton, J., T. Abichou, et al. (2011). "Observations on the methane oxidation capacity of landfill soils." *Waste Management* 31(5): 914-925.
- Chanton, J. P., D. K. Powelson, et al. (2009). "Methane Oxidation in Landfill Cover Soils, is a 10% Default Value Reasonable? ." *J. Environ. Qual.* 38(2): 654-663.
- Gebert, J. and A. Groengroeft (2006). "Passive landfill gas emission - Influence of atmospheric pressure and implications for the operation of methane-oxidising biofilters." *Waste Management* 26(3): 245-251.
- Hilger, H. H. and M. A. Barlaz (2007). Anaerobic decomposition of refuse in landfills and methane oxidation in landfill covers. *Manual of Environmental Microbiology*. Washington, ASM Press: 818-842.
- IPCC (2007). *Climate Change 2007: Mitigation. Contribution of Working Group III to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change* [B. Metz, O.R. Davidson, P.R. Bosch, R. Dave, L.A. Meyer (eds)], Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA.
- Poulsen TG, Christophersen M, et al. (2003). "Relating landfill gas emissions to atmospheric pressure using numerical modelling and state-space analysis." *Waste Management and Research* 21: 356 - 366.
- Scharff, H., D.M.M.v.Rijn, et al. (2003). "A comparison of measurement methods to determine landfill methane emissions". NV Afvalzorg, Haarlem, The Netherlands.
- Stern, J. C., J. Chanton, et al. (2007). "Use of a biologically active cover to reduce landfill methane emissions and enhance methane oxidation." *Waste Management* 27(9): 1248-1258.
- Whalen, S. C., W. S. Reeburgh, et al. (1990). "Rapid Methane Oxidation in a Landfill Cover Soil." *Applied and Environmental Microbiology* 56(11): 3405-3411.



SPURLING
HANSEN
ASSOCIATES


Landfill Services Group

- Landfill Siting
- Design & Operations Plans
- Landfill Siting
- Environmental Monitoring

#8 - 1225 East Keith Road
North Vancouver, B.C. V7J 1J3
Phone: (604) 986-7723
Fax: (604) 986-7734

LEGEND:

- 5m EXISTING CONTOUR
- 1m EXISTING CONTOUR
- FENCE
- DITCH LINE
- ROAD
- CH4 EMISSION HOT SPOT
- SIDE SLOPE AREA
- CREST AREA
- 2016/2017 WASTE DISPOSAL

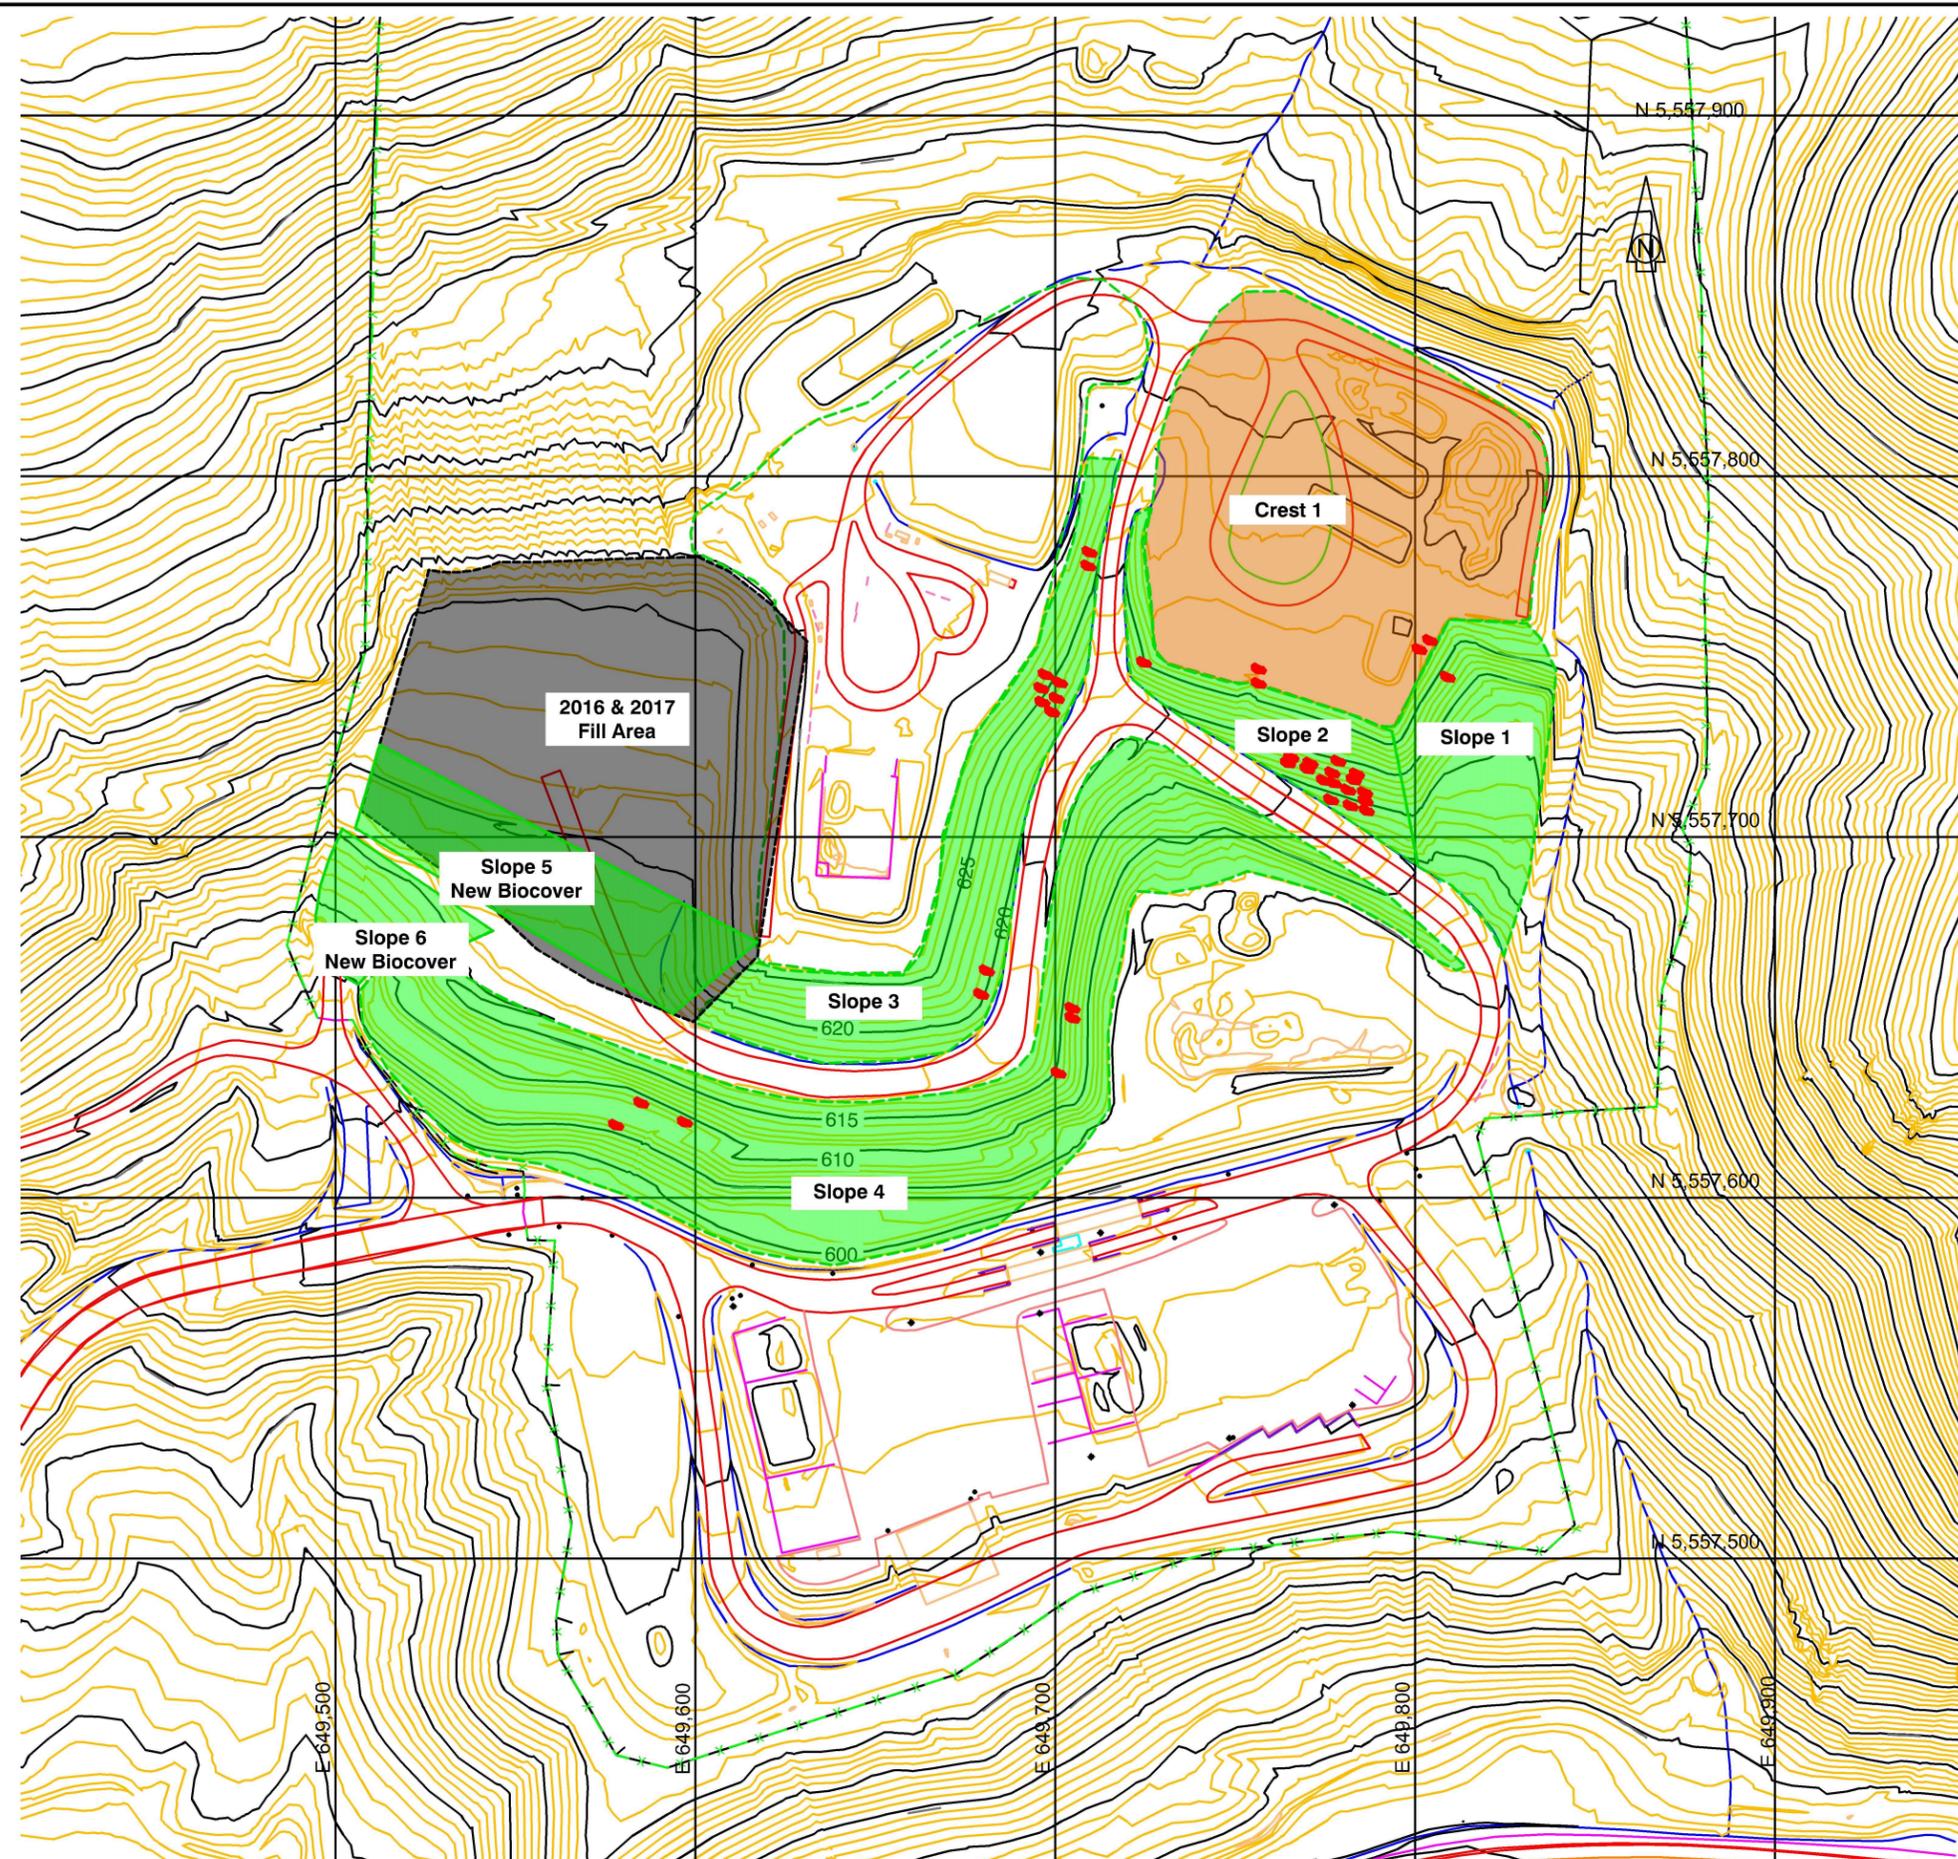

CLIENT:



PROJECT:

LOWER NICOLA LANDFILL
BIOCOPER 2016 GHG CREDIT
QUANTIFICATION

TITLE:

FID SURFACE SCAN AREAS

SCALE: 1:2,000	DATE: 2017/05/28 yyyy/mm/dd	PROJECT NO: PRJ 18012
DESIGNED AA	DRAWING NO: FIGURE 3	
DRAWN AA		
CHECKED MC		